

# T8 2x17

110 - 277V

Wide Range 120 to 277V input  
 Electronic Ballast  
 Open Circuit Voltage 600 Vrms  
 Min Start Temp 0 °F (-18°C)  
 Inherent Thermal Protection  
 Class P, Outdoor Type 1  
 Type HL  
 FCC Part 18 Class A  
 High Power Factor  
 Sound Rated A  
 For N-1 lamp operation, insulate  
 unused blue  
 lead to 600Vrms

# 2S



## ELECTRONIC BALLAST



E132DJ




Lamp	Un(V)	In(A)	Fn(Hz)	PF(λ)	ta(°C)
1xT8 32W	110-130	0.30	50~60	0.98	-20~+50



U-OUT=390V tc:75

U-OUT<350VAC r.m.s.

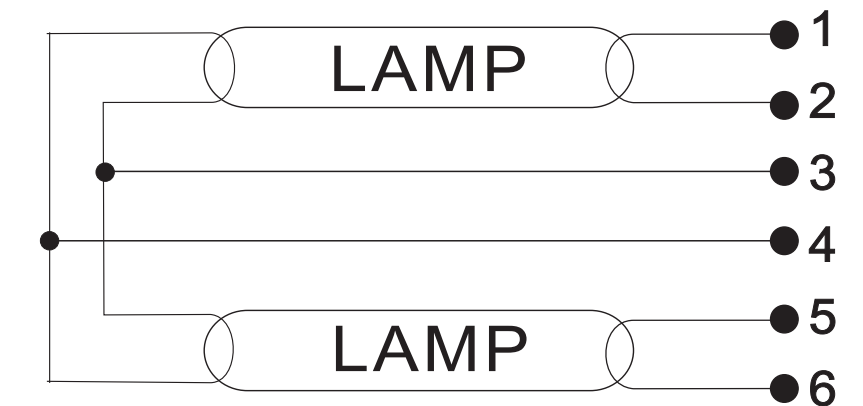

Wires preparation: 0.5~0.75mm<sup>2</sup> 7-9mm